

# KUNARK HITECH MACHINING & SALES PVT.LTD.



Kunark House, 269, Kunark Marg, Kaman Bhiwandi Road, Kaman,

Vasai Road (East), Dist: Thane -401208, Maharashtra, India.


Mobile: (+91) 9867973046 Factory: 0250-6454895 Fax: 022-28845625

Email: [info@jkgears.com](mailto:info@jkgears.com), [jkgears9999@hotmail.com](mailto:jkgears9999@hotmail.com) website: [www.jkgears.com](http://www.jkgears.com)







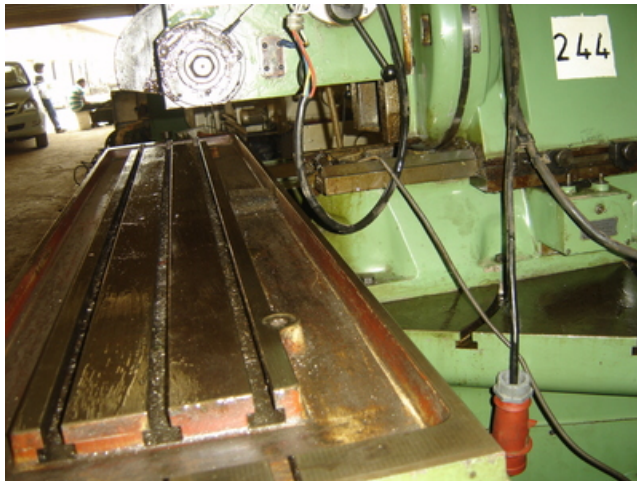



<b>Machine Id</b>	<b>:- 458</b>	<b>Serial No</b>	<b>:-</b>
<b>Category</b>	<b>:- Gear Related Machines</b>	<b>Model</b>	<b>:- UFZM - V</b>
<b>Country</b>	<b>:- Germany</b>	<b>Make</b>	<b>:- Knapp</b>
<b>Type of Machine</b>	<b>:- Rack Hobbing Cum Rack Milling</b>	<b>Year</b>	<b>:- 1980</b>
<b>Weight</b>	<b>:- 0.0</b>	<b>Dimensions</b>	<b>:-</b>
<b>Power</b>	<b>:-</b>	<b>Location</b>	<b>:- Mumbai Warehouse,India</b>

### Specification :-

Type of machine **Rack Hobbing Cum Milling Machine**

Make **KNAPP**

Type **UFZM - V 300 H**

Year of manufacture 1980

Type of control conventional

Country of origin Germany

Delivery time immediately

### **Technical details**

hobbing length 1500mm

milling width 260 mm

max. module

15

weight of the machine ca.

4,5 t

**Additional information**

Max. length of rack 1500 mm  
Milling travel / milling width cross max. 260 mm  
Module, steel / cast iron 12 / 14  
Table clamping size 275 x 1,850 mm  
Mounting height below cutter, depending on cutter 136 - 410 mm

Cutter , min./max 125 + 2 x cutting depth / 280 mm  
Cutter width max. floating / with support 50 / 140 mm  
Cutter mandrel max. 50 mm  
Milling spindle head, swivelling right / left 30 / 45 Ø°  
9 spindle speeds 22 - 136 rpm  
Milling slide swivelling right / left 30

Feeds, infinitely variable (milling slide) 0 - 600 mm/min  
Quick return 3,000 mm/min

Milling spindle drive 4 kW  
Total electrical load 6 kW - 380 V - 50 Hz  
Weight 4,500 mm

#### Accessories / Special Features

- \* Automatic milling cycle control via cam block with possibility of jump switching (= automatic by-pass of an area which should not be milled) and pendulum milling operation (= synchronized milling on the first half of table, and tool change on the second half).
- \* 2-parts hydraulic workpiece clamping device: 800 x 260 mm each (individually controlled by the pendulum milling operation).
- \* Heavy duty milling head with drive for milling speeds and flywheel.
- \* Manual fine adjustment of table (0.001 mm) for exact positioning in a pre-milled gear.
- \* Various change gears (approx. 10 pieces). \* 2 cutter mandrels. \* Various other accessories.
- \* Central lubrication. \* Built-in hydraulic unit. \* Coolant device with magnetic separator.
- \* Separate switch cabinet.

This machine is especially suitable for milling racks, and also for manufacturing broaching tools (relief milling is possible by swivelling the cutter head).

#### Description :--