

# KUNARK HITECH MACHINING & SALES PVT.LTD.




Kunark House, 269, Kunark Marg, Kaman Bhiwandi Road, Kaman,



Vasai Road (East), Dist: Thane -401208, Maharashtra, India.

Mobile&Whatsapp: +91 9867973046, Mobile 2:- +91 7977043901

Goggle Map:- <https://maps.google.com/maps?q=19.372000+72.902095>

Email: [info@jkgears.com](mailto:info@jkgears.com), [dalbirbright@gmail.com](mailto:dalbirbright@gmail.com) website: [www.jkgears.com](http://www.jkgears.com)

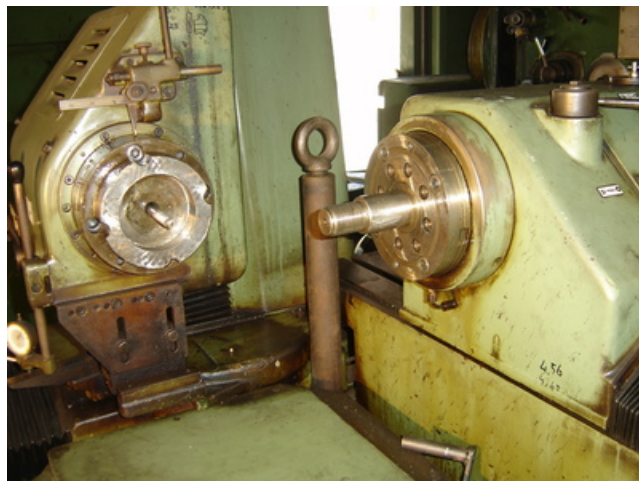

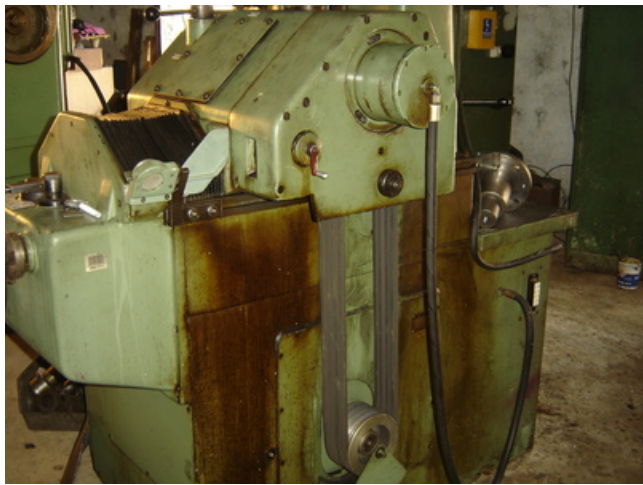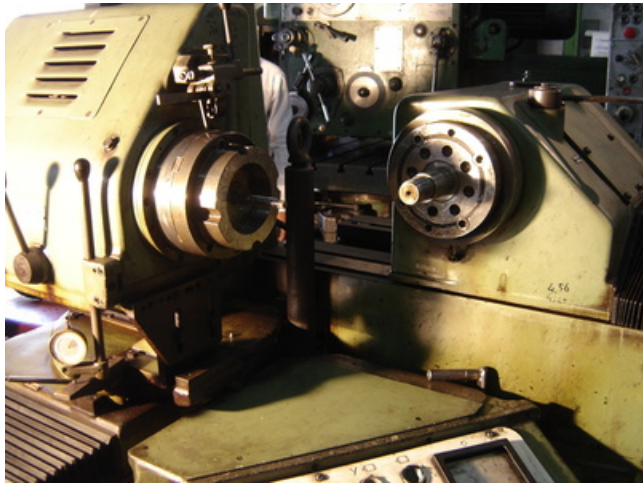

Video :-

Please click here for video



<b>Machine Id</b>	<b>:- 529</b>	<b>Serial No</b>	<b>:-</b>
<b>Category</b>	<b>:- Gear Related Machines</b>	<b>Model</b>	<b>:- ZPLZK 500</b>
<b>Country</b>	<b>:- Germany</b>	<b>Make</b>	<b>:- WMW</b>
<b>Type of Machine</b>	<b>:- Bevel Gear Testing Machine</b>	<b>Year</b>	<b>:- 1990</b>
<b>Weight</b>	<b>:- 0.0</b>	<b>Dimensions</b>	<b>:-</b>
<b>Power</b>	<b>:-</b>	<b>Location</b>	<b>:- Mumbai Warehouse,India</b>

Specification :-

## Bevel Gear Testing Machine - WMW-MODUL - ZPLZK 500

Offer details

Type of machine Bevel Gear Testing Machine

Make WMW-MODUL

Type ZPLZK 500

Year of manufacture 1980

Type of control conventional

Country of origin Germany

Delivery time immediately

Freight basis ex Warehouse

Technical details

max. wheel diameter 500 mm

gear width mm

module 12

total power requirement 5 kW

weight of the machine ca. 3,4 t

Additional information

Max. / min. gear 500 / 30 mm

Max. / min. pinion 355 / 30 mm

Max. axial offset +/- 80 mm

Adjustable shaft angle 90 - 180 degree

Max. / min. distance from face of pinion spindle to gear axis 350 / 160 mm

Max. / min. distance from face to gear spindle to pinion axis 305 / 110 mm

Centre distance for spur gears 60 - 435 mm

Max. spur gear 500 mm

Spindle cone 100 mm

Speeds of pinion spindle, infinitely variable 105 - 3,000 rpm

Total electrical load, approx. 5 kW - 380 V - 50 Hz

Weight, approx. 3,400 kg

#### Accessories / Special Features

- \* Basic settings of machine are by using gauges.
- \* Infinitely various speeds via DC drive.
- \* Hydraulic workpiece clamping.
- \* Separate switch cabinet